

CLAMP CHANGER

The Premier Clamp Changer has been developed in response to customer requests for a pallet changing method that does not require tipping or inverting of the load.

It has twin, soft rubber faced clamp plates that gently grip the product. The clamping pressure on the load is adjustable, and can be increased to the point where the machine will hold a load weighing up to 1000kgs.



USES INCLUDE


- Fast pallet to pallet transfer of block-stacked goods such as cardboard boxes or plastic crates
- Transfer of loads that cannot be tipped or inverted

KEY FEATURES


- Load by pallet truck
- Twin, chain-connected clamp tables with soft rubber lining
- Adjustable pressure to enable load of up to 1000kgs to be clamped
- Side guarding

Method of operation


Load is wheeled into machine




Operator presses 'clamp' button, and the load is gripped just above pallet height.




Old pallet is lowered and removed



New pallet is placed under the load



Operator presses 'unclamp' and removes the load on the new pallet.




CLAMP CHANGER

Specifications

Sidewalls	1200mm deep
Sidewalls Opening Range	700mm x 1300mm
Maximum Load Height	No Restriction
Loading Capacity	1000 kgs
Power Supply	3 phase / 400V / 16 amp
Motor Size	2.2kW
Weight	1500 kgs
Controls	24V Hold to run push button
Actual Operating Space	A Width 2590mm B Depth 1895mm C Height 2195mm
Standard Shipping Dimensions (machine only)	Width 2590mm Depth 1895mm Height 2195mm

PLAN VIEW

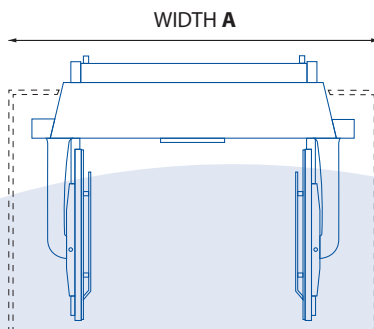

SIDE ELEVATION

